



DESCRIPTION

- Manufactured from HDPE using the injection moulding method and 100% virgin raw material
- Compatible with EN 840-2-5-6
- Smooth surface for easy cleaning
- Resistant to UV, cold, heat, and chemicals
- Lid opener 270 degree and fixed through two metal pins
- Print area on body and lid
- Ø 200 mm wheels, 2 with breaks
- Smooth-running wheels with breaks
- Designed to accommodate data carriers
- Compatible with standard lifting equipment

EXTRA OPTIONS

- Foot pedal
- Hot Stamping
- Screen Printing
- Lid in Lid
- Liquid Evacuation System

LID AND BODY AVAILABLE COLORS





TECHNICAL FEATURES

Capacity	660l
Length	1380 mm
Lid Length	1223 mm
Base Length	1145 mm
Width	780 mm
Width Between Axis	490mm
Width Between Wheels	625 mm
Height	1150 mm
Height Without Lid	1050 mm
Ø Wheels	200 mm
Weight	39 kg
Load	270 kg



LOGISTIC DATA

20' DC	65
40' DC	135
40' HC	145
90 cbm Truck	180

LOGO APPLICATION AREAS



DIMENSIONS

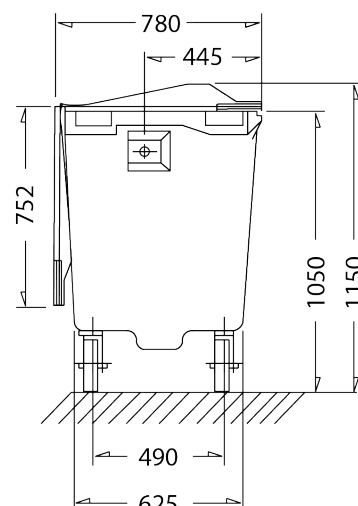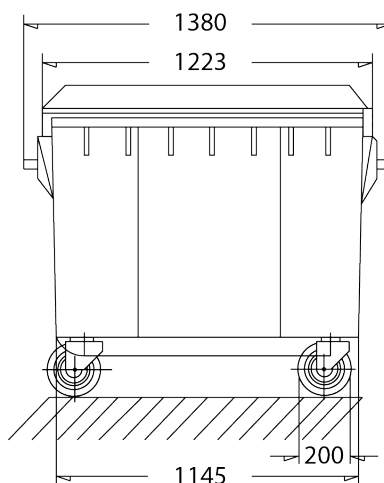

PRODUCT REFERENCES

LID AND BODY AVAILABLE COLORS



Lid and Body Standard Colors	Product Reference Without Foot Pedal	Product Reference With Foot Pedal
	011.00109	011.00104
	011.00110	011.00105
	011.00111	011.00106
	011.00112	011.00107
	011.00113	011.00108
	011.00114	011.00103